

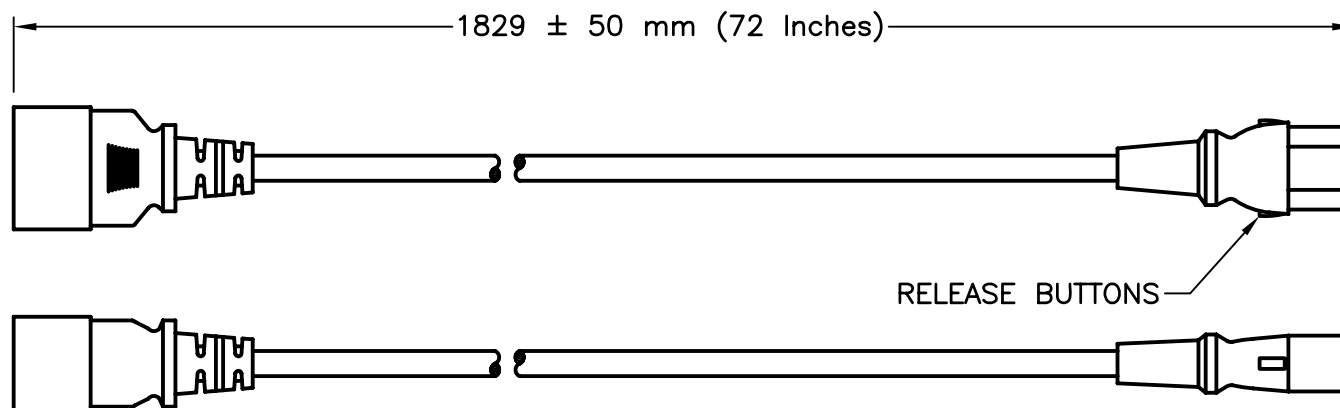
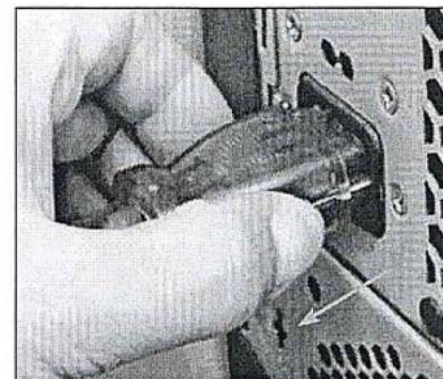


| | |
|----------------|---|
| STANDARDS | IEC 60320 <input checked="" type="checkbox"/> |
| APPROVALS | UL <input checked="" type="checkbox"/> C-UL <input checked="" type="checkbox"/> |
| CERTIFICATIONS | ROHS <input checked="" type="checkbox"/> |

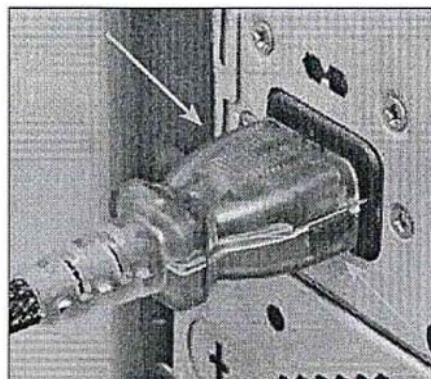

IEC 60320, C20

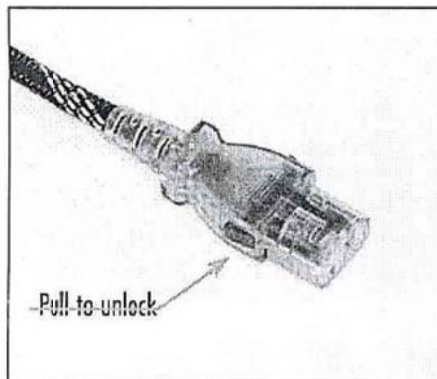

IEC 60320, C13
LOCKING

SPECIFICATIONS:

1. OVERALL LENGTH: 1829 ± 50 mm (72 INCHES)
2. CONDUCTORS: 14awg-3c
3. JACKET: SJT WHITE
4. PLUG: IEC 60320 C20, STRAIGHT, WHITE
5. CONNECTOR: IEC 60320 C13 LOCKING, STRAIGHT, BLACK
6. RATED: 15 AMPERE 250 VOLT
7. PUT-UP: COILED
8. WEIGHT (APPROX): 0.7 LBS / 0.32 Kg
9. MISCELLANEOUS:

WORLD CORD SETS, INC.

TEL (860)763-2100
FAX (860)763-1183



www.WorldCordSets.com
sales@WorldCordSets.com

TITLE

C20 to C13 LOCKING

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE
NONE

DATE
06-14-2013

PART NO.
2013K-H-072-WHT

REV
—