


STANDARDS	IEC 60320 <input checked="" type="checkbox"/>
APPROVALS	CSA <input checked="" type="checkbox"/> UL <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

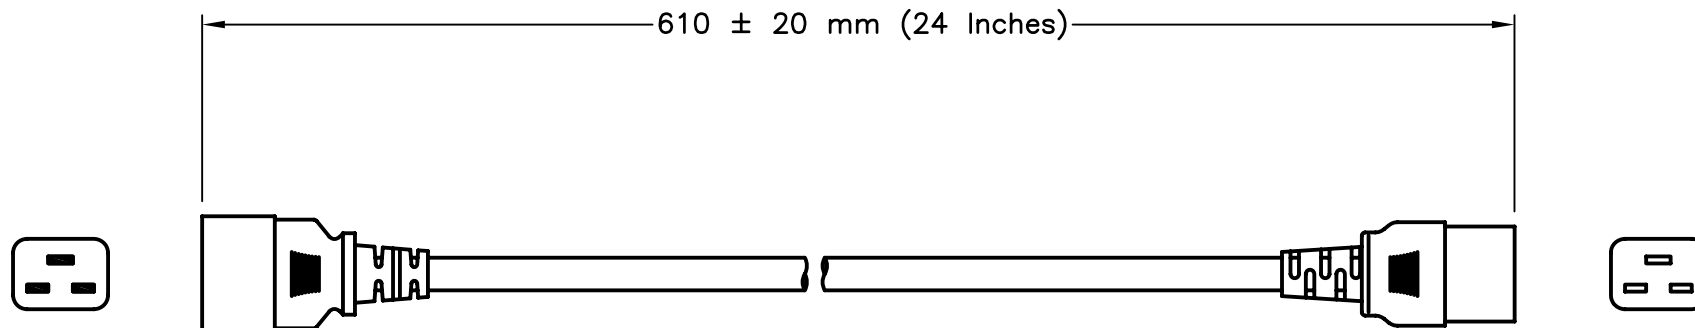

IEC 60320, C20
(ROTATED 90°)

IEC 60320, C19
(ROTATED 90°)

SPECIFICATIONS:

- | | |
|---------------------|------------------------------|
| 1. OVERALL LENGTH: | 610 ± 20 mm (24 INCHES) |
| 2. CONDUCTORS: | 14/3 CEE COLOR CODE |
| 3. JACKET: | SJT(OW), 105°C, RED |
| 4. PLUG: | IEC 60320 C20, STRAIGHT, RED |
| 5. CONNECTOR: | IEC 60320 C19, STRAIGHT, RED |
| 6. RATED: | 15A 250V |
| 7. PUT-UP: | BULK PACKED |
| 8. WEIGHT (APPROX): | 0.35 LBS / 0.16 Kg |
| 9. MISCELLANEOUS: | |

WORLD CORD SETS, INC.

TEL (860)763-2100
FAX (860)763-1183



www.WorldCordSets.com
sales@WorldCordSets.com

TITLE

IEC 60320 C20 C19 POWER CORD

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS.
NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE
NONE

DATE
06-18-2012

PART NO.
2019-H-024-RED

REV
-